




## Workholding Closed Center Rotating Hydraulic Double Cylinder

RCD With Stroke Control

- Special double acting cylinder has two separate piston actuations
- Can integrate rear attachments such as air sensing, air blow, coolant, etc
- Available with stroke control
- Can be used vertically or horizontally
- Optionally add rotary union for air sensing, air blow, or coolant
- Priced on Application

Model No.	Piston Area (Sq. in.)		Max Piston Stroke	Max Speed RPM	Pressure PSI	Weight (lbs)
	Piston 1	Piston 2				
10-767-1370Z	17.52/19.38	4.96/5.58	2.756/.787	5000	735	66
10-767-1770Z	29.14/34.10	4.96/5.58	3.223/.787	4000	735	110

### Dimensional Data

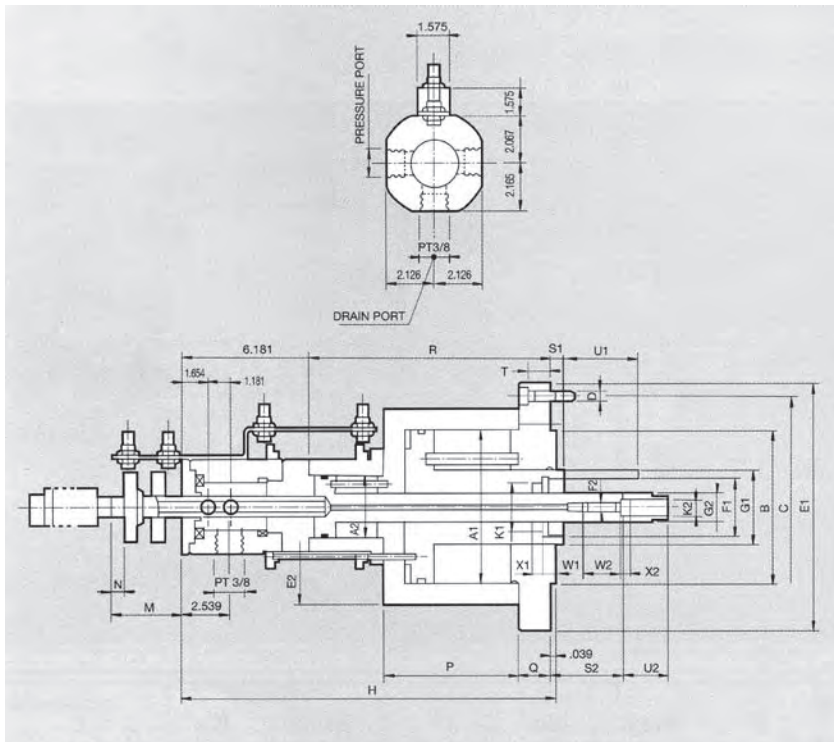

Model	1370Z	1770Z
A1	5.118	6.693
A2	2.756	2.756
B	5.118	6.693
C	7.480	9.252
D	6-M12	6-M16
E1	8.465	10.630
E2	6.693	8.268
F1	M42xP1.5	M42xP1.5
F2	M16	M16
G1	1.969	2.756
G2	1.102	1.102
H	15.039	15.906
I	.197	.197
K1	1.102	1.969
K2	.708	.708
M	2.559	2.559
N	.591	.591
P	5.197	5.748
Q	1.024	1.339
R	8.661	9.528
S1 (min)	.394	.394
S2 (min)	3.701	2.835
T	.551	.709
U1	2.756	3.228
U2	.787	.787
W1	.709	.787
W2	.984	.984
X1	.472	.472
X2	.472	.472